




Condensing Hot Water Boiler


CCOB80A | CCOB110A | CCOB130A

FEATURING:


- Certified design according to ANSI Z21.13 - CSA 4.9-2017 standards for indoor residential applications
- Gas Input Ranges
#CCOB80A - 80,000 to 19,900 BTUh
#CCOB110A - 110,000 to 19,900 BTUh
#CCOB130 - 130,000 to 19,900 BTUh
- Dual Primary and Secondary Stainless Steel Heat Exchangers for optimum efficiency and durability
- Weight - 66lbs
- Compatible with 2" PVC vent up to 60ft** and 3" PVC vent up to 150 ft** (**with no elbows)
- Built-in Control Panel - allows adjustment of temperature and boiler functions including Outdoor Reset Curve setting, heating setback, Integrated Low Water Safety Control, water fill pressure, and output capacity.
- Outdoor Temperature Sensor (included) - the unit controls will sense outdoor ambient temperature and adjust the boiler operation for maximum comfort and efficiency
- Temperature Options - hydronic heating temperature setting range from 82°F up to 180°F
- Outdoor Reset Sensor - when installed with an VRB model, the unit controls will sense outdoor ambient temperatures and adjust the boiler operation for maximum comfort and efficiency
- AFUE Ratings CCOB80A / 110 / 130 - 95.0% (NG/LP)
- Compatible with Natural Gas(NG) and Propane (LPG)*** (**requires installation of included Field Conversion Kit by a qualified service agency)
- Certified by CSA, ASME
- 15-Year Heat Exchanger and 5-Year Parts Warranty (Residential) 10-Year Heat Exchanger and 3-Year Parts Warranty (Commercial)




VENTING OPTIONS:




Direct Vent (Indoor)




Non-Direct Vent (Indoor)



Direct Vent Termination (Indoor)


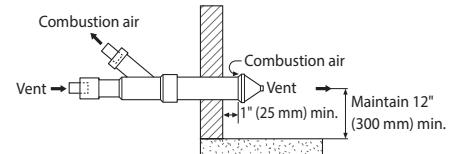


Direct Vent Concentric Termination (Indoor)




Model		CCOB80A	CCOB110A	CCOB130A	
Heat Capacity (Input)	Space Heating	19,900-80,000 BTU/H	19,900-110,000 BTU/H	19,900-130,000 BTU/H	
AFUE	Natural Gas (propane)	95.0% (95.0%)	95.0% (95.0%)	95.0% (95.0%)	
Dimensions (W x D x H)	18.1" x 27.6" x 11.6" (460 mm x 700 mm x 295 mm)				
Installation Type	Indoor wall-hung				
Venting Type	Forced draft direct vent				
Ignition	Electronic ignition				
Water Pressure	12-30psi				
Supply Pressure	Natural Gas	3.5" - 10.5" WC			
	Propane	8" - 13" WC			
Temperature Range	Space Heating	82°F - 180°F (27°C - 82°C)			
Connection Sizes	Space Heating Supply	1" NPT			
	Space Heating Return	1" NPT			
	Gas Inlet	3/4" NPT			
Power Supply	Main Supply	120V AC, 60 Hz / use less than 5 AMP			
Materials	Primary Heat Exchanger	Stainless steel			
	Secondary Heat Exchanger				
Venting	Exhaust/Intake	2" or 3" PVC, CPVC, Polypropylene 2" or 3" Special gas vent type BH (Class II, A/B/C)			
	Length	2"	60ft (18.3m)		
		3"	150ft (45.7m)		
	Vent Clearances	0" to combustibles			
Safety Devices		Flame rod, APS, Over heat preventer, Low water cut off switch Exhaust temperature high limit sensor, Power surge fuse			

DIMENSIONS:

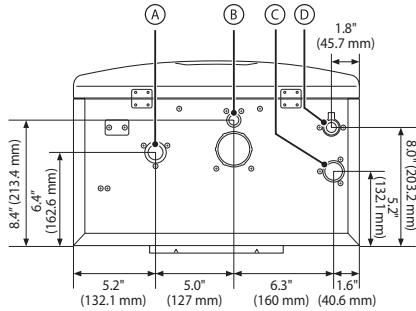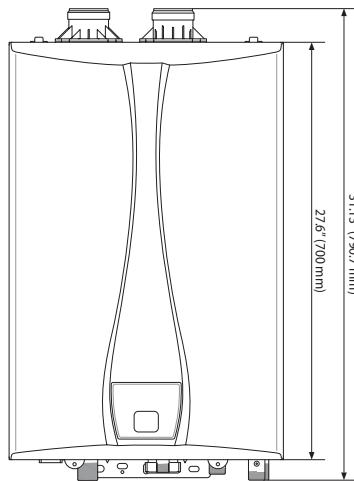

	Description	Diameter
A	Space Heating Return	1" NPT
B	Condensate Outlet	1/2" NPT
C	Space Heating Supply	1" NPT

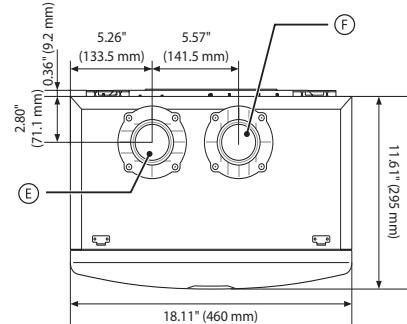

	Description	Diameter
D	Gas Inlet	3/4" NPT
E	Exhaust Vent	2"
F	Air Intake	2"

Gas-fired, Condensing, wall-mounted boiler(s) shall be direct vent CCOB Series models as manufactured by Custom Comfort and are certified by CSA Group to the latest edition of ANSI standard Z21.13/ CSA 4.9. Boilers(s) shall have a 15-year limited Heat Exchanger warranty and 5-year limited Parts warranty (10-year Heat Exchanger and 3-year Parts for commercial use) per the Custom Comfort Limited Warranty. Unit(s) shall be designed to burn natural gas and can be used with propane when a Field Conversion Kit is installed. Boilers(s) shall be vented with 2" PVC/CPVC vent pipe at a distance not to exceed 60' (or equivalent) with each elbow equal to 8' of pipe length or 3" PVC/CPVC vent pipe at a distance of 150' (or equivalent) with each elbow equal to 5' of pipe length. Boiler(s) is rated for 30 PSI for Heating. Gas supply pressure shall be 3.5" to 10.5" WC for natural gas and 8.0" to 13.0" WC for propane. Unit(s) shall have a steel case, dual stainless-steel heat exchangers, eco premixed burner, negative pressure gas valve, TDR Damper, 3/4" inlet gas connection, and 1" brass inlet/outlet heating connections. The CCOB80A, CCOB110A and CCOB130A models weighs 66 lbs. Unit(s) shall include features such as an adjustment for different vent lengths, & temperature lockout. The Boilers(s) shall be controlled by an internal circuit board that monitors the Heating inlet and outlet temperatures with installed thermistors. Unit(s) shall include safety features such as flame sensor system, high limit sensors, overheat prevention device, freeze protection mode, and fan motor rotation detector. The Boilers(s) exceeds the energy efficiency requirements of ASHRAE 90.1-2013.

*Custom Comfort reserves the right to change specifications at any time without prior notice.

Job Name:

Location:

Engineer:

Wholesaler:

Contractor:

Model No:

Submits to:
